

Lithium Battery ES24-200

EverExceed[®]
power your applications

Key Features

- ◆ **Longer Cycle Life:** Offers up to 10 times longer cycle life and five times longer float/calendar life than a lead-acid battery, helping to minimize replacement cost and reduce total cost of ownership.
- ◆ **Faster charge:** Can fully charge the battery within 2 hours;
- ◆ **Lighter Weight:** About 40% of the weight of a comparable lead-acid battery. A 'drop in' replacement for lead-acid batteries.
- ◆ **Higher Power:** Delivers twice the power of the lead-acid battery, even high discharge rate, while maintaining high energy capacity.
- ◆ **Wider Temperature Range:** -20°C to +60°C.
- ◆ **Superior Safety:** Lithium Iron Phosphate chemistry eliminates the risk of explosion or combustion due to high impact, overcharging, or short circuit situations.
- ◆ **Increased Flexibility:** This model can easily replace similar capacity lead acid battery without any extra hassle.

Application

- ◆ Energy storage system
- ◆ Solar application
- ◆ Telecom application
- ◆ Emergency lighting
- ◆ Medical equipment



Best quality lithium battery for energy storage application in best prices.



More than 3000 life cycles in 100% DOD greatly saves TCO



the LCD display is optional


Battery Model	ES24-200
Battery Technology	LiFePO4
Nominal Voltage	25.6V
Nominal Capacity	200Ah
Nominal Energy	5.12KWh
Dimension (WxDxH)	483x550x177mm
Weight	46Kg
Boost Charge Voltage	28.8V
Discharge Cut-off Voltage	20-22V
Max Charge Current	100A
Recom. Charge Current	50A
Max Discharge Current	100A
Working Temperature Range	Discharge: -20°C to +60°C Charge: 0°C to +60°C Storage: -20°C to +60°C
Cycle Life	≥3000 Cycles @ 100% DOD @ 25°C
Communication	RS485
Safety Standard	CE, UN38.3
Design life	15+ years @25°C
Protection	Short circuit, over charge, over discharge, under charge, under discharge, over/under temperature etc.

Lithium Battery ES24-200


EverExceed[®]
power your applications

Performance Curve


State of Charge Curve @0.5C 25°C

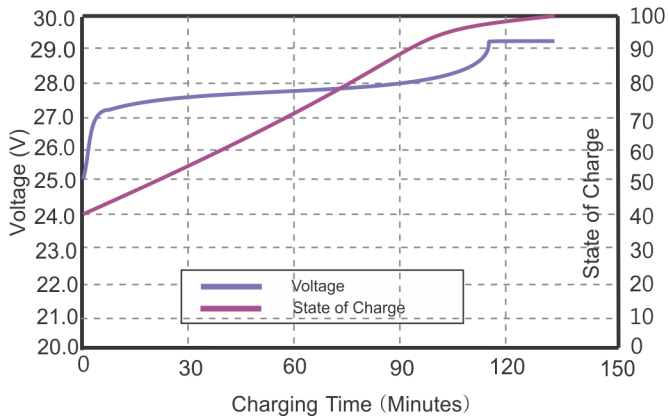


Charging Characteristics @0.5C 25°C

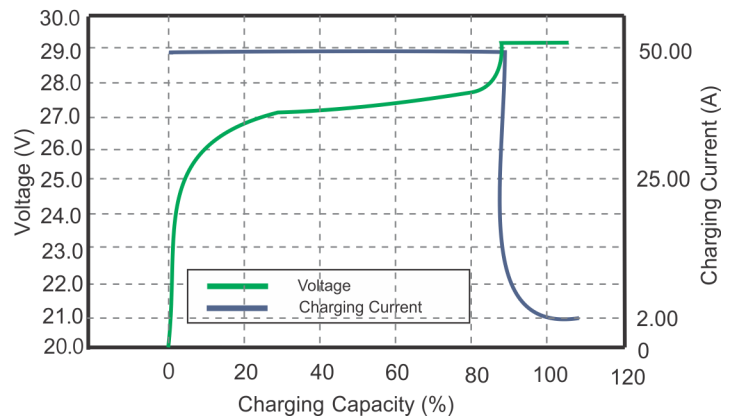


Different Rate Discharge Curve @25°C

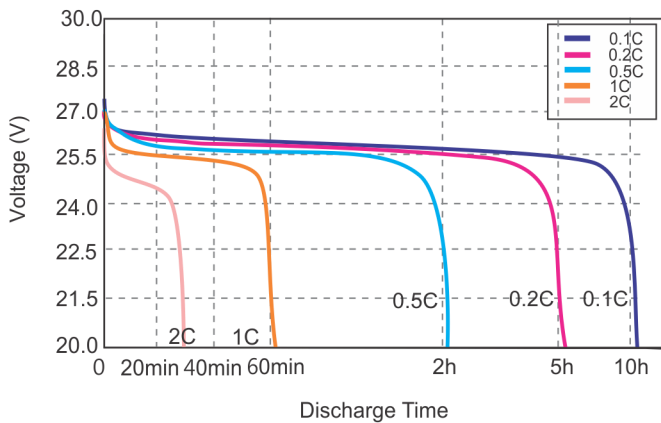

Different Temperature Discharge Curve @0.5C

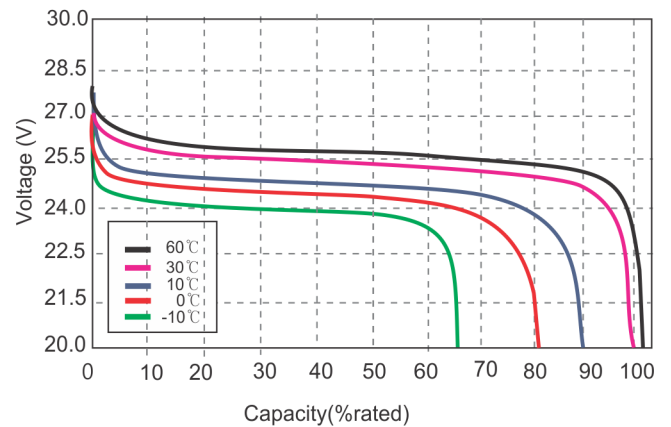

Different DOD Discharge Cycle Life Curve @0.2C

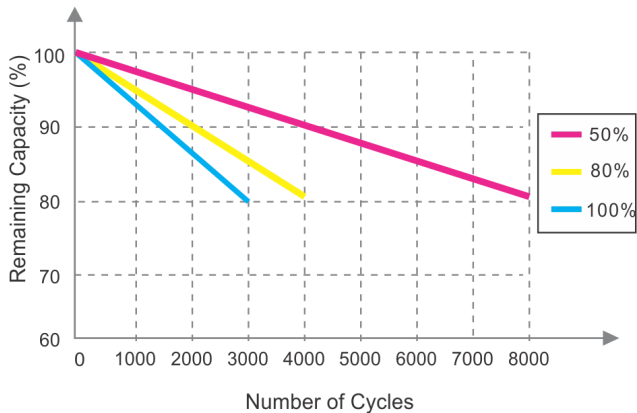

Different Temperature Self Discharge Curve

